


# 302-70 Silent Select Wiring



Before beginning installation, disconnect the battery to avoid any accidental contact with "live" wires. Use 10-12 gauge wire to the dash to minimize voltage drop to the actuators. When finished, securely fasten all wiring to prevent loosening of the connections.

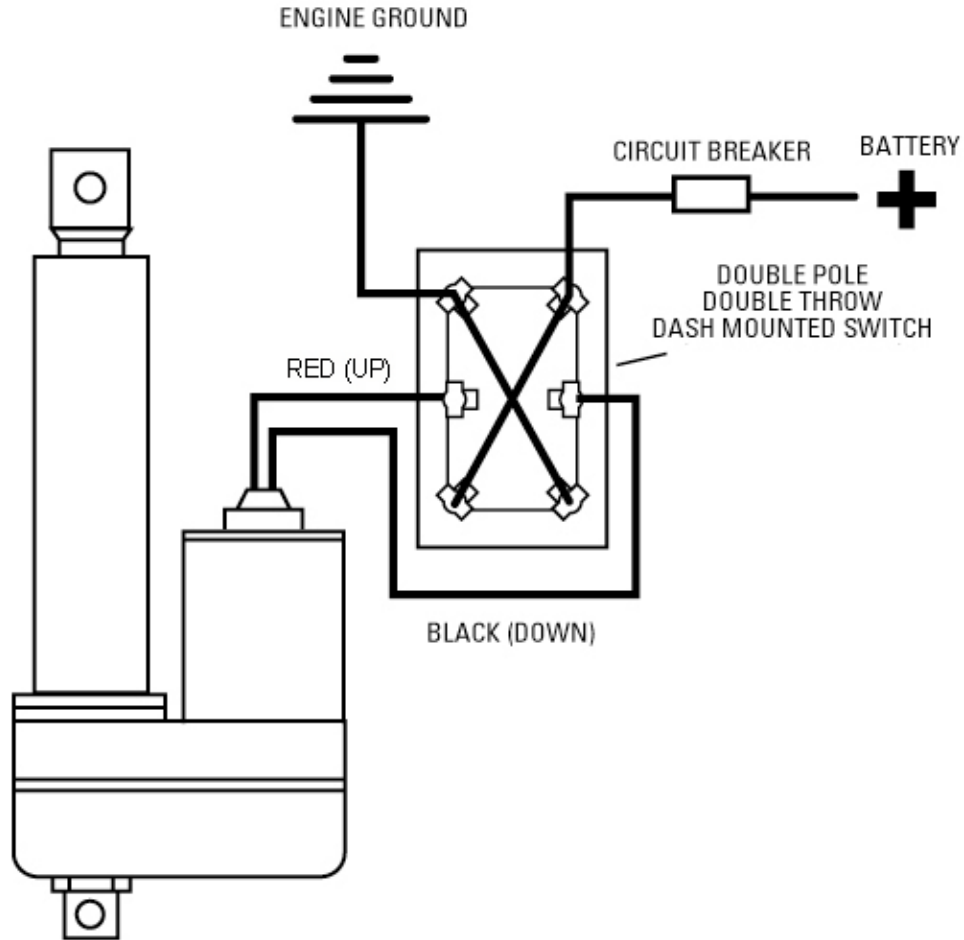